

The Virtual Access GW1000M Series Router

Rugged Compact 4G/LTE & WiFi Router for Automotive & Site-based Applications



Applications:

- In-vehicle WiFi services
- M2M and site-based connectivity
- Fixed line backup over cellular data network
- Digital signage

Router Features:

- 2.4GHz WiFi
- Dual Ethernet
- Built-in GPS receiver option
- Dual SIM
- Rugged aluminium enclosure

Overview

The Virtual Access GW1000M Series router is a compact and rugged 4G/LTE router with WiFi, designed with a metal housing for use in vehicles and a wide range of site-based applications.

The GW1000M Series router enables 4G/LTE or 3G HSPA+ connectivity in a wide range of applications including telemetry, remote monitoring and WiFi services in buses, taxis and fleet vehicles. The product is equally at home in site locations offering primary WAN, 4G/LTE failover to fixed line connections. Its small size is ideal for M2M applications such as remote monitoring and control.

The product line offers a new entry point for 4G/LTE data applications and supports the following radio access technologies: LTE, HSPA+, HSPA, UMTS, EDGE, GPRS and GSM.

Dual Ethernet Ports

The GW1000M Series router offers two 10/100Mbps Ethernet interfaces. They can be configured as a single interface with Ethernet switching between them or as separate router interfaces.

Dual SIM

Dual SIM architecture ensures that a backup 3G or LTE network can take over should the primary network fail. The router detects a network problem and fails over to a standby SIM/APN.

Ignition Sense

In automotive applications, the ignition sense input can detect when the vehicle's ignition has been enabled. This allows the GW1000M to remain powered on after the vehicle has stopped. The time delay between ignition off and power down is configurable.

WiFi

The GW1000M Series router has two external SMA female connectors for integrated WiFi support. It is capable of supporting both Access Point mode and Station mode concurrently if required.

Voltage Sensor

An additional input wire is provided that can be used to detect a voltage and the device can use this to make behaviour changes. For example, this can be used to enable the WiFi only when a taxi meter is running.

GPS Receiver

The GW1000M Series router includes a GPS receiver that can be used for vehicle positioning. The vehicle's coordinates, direction and speed can be reported to a central application tracking server periodically.

SMS Management

The GW1000M Series router also supports SMS, so if the packet switched side of the network is down, you can send commands to the router to perform diagnostics or even a reload.

Active Power Conditioning


Vehicle battery voltages often experience transients and there can be substantial voltage dip during engine start up. The GW1000M Series router incorporates an active power conditioner, which is designed to accommodate the voltage dips, surges and transients commonly found in vehicles.

Mounting Bracket

A bracket is included that enables simple mounting. The bracket can be clipped onto a DIN rail for industrial applications.

Centralised Management and Monitoring

The GW1000M Series router benefits from Activator, Virtual Access' centralised configuration management and monitoring system. Activator simplifies and automates deployment, management and support tasks in managed network environments.

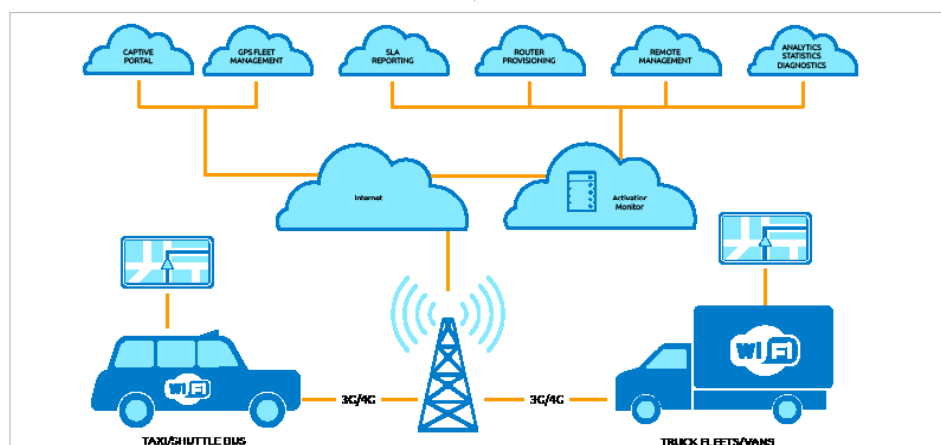

Software Features

Management

- Automatic configuration using Activator server
- HTTP/HTTPS
- Command Line Interface via Telnet or SSH
- TFTP client download/upload
- SNMP agent
- SMS management support

Fault Investigation and Reporting

- Event logging
- Syslog support
- Packet tracing

Routing Features

- IPv4 and IPv6
- DHCP server/client
- DynDNS
- NAT
- NAT Traversal
- NTP Client
- VLAN support
- Packet filtering
- Firewall
- Port forwarding
- BGPv4, OSPF
- RIP (v1 and v2)
- IPSec/L2TP/GRE
- DMVPN
- SNMP v1/v2/v3
- TLS 1.2
- 802.1x authentication
- IEC 104
- QoS
- VRRP

IPSec VPN Options

- IKE version 2
- X.509 certificates
- Elliptic Curve Cryptography (ECC)
- SHA2_512 support
- AES_CBC (256), 3DES and DES
- PFS
- SCEP
- DH_8192

Hardware Features

LAN Interface Options

- Dual 10/100Mbps base-T Ethernet port
- Auto detects full- or half-duplex operation
- Auto detects a regular or crossover cable for easy connection to a switch or hub

WAN Interfaces

- Wireless WAN with 3G and LTE options
- Ethernet ports can optionally be configured for WAN use

WiFi Option

- 2.4GHz 802.11bgn
- Concurrent Access Point and Station mode
- Dual SMA sockets

SIM

- 2 x SIM card socket with optional slot cover

Antennas

- 2 x LTE SMA female antenna connectors
- MIMO support in LTE versions
- 1 x GPS SMA female antenna connector with 3v3 Active power feed
- 2 x SMA female WiFi antenna sockets

LEDs

- Power indicator
- Ethernet activity
- Active SIM
- WiFi

Approvals and Certificates

- EN 62368 safety approval
- EN 55022 and EN 55024 EMC
- EN 300 328 V1.9.1

Power

- 4W typical
- Power lead is supplied with 4 connectors for +12V, ignition +12V, 0V and voltage sense
- Voltage range:
 - 9-36V isolated DC input (DCi0936)
 - 9-36V DC non-isolated input (DCn0936)
 - 18-60 V isolated DC input (DCi1860)
 - AC adapter available (100-240V)

Physical and Environment

- Unit size: 115W 111D 38H mm
- Unit size with mounting bracket: 120W 120D 45H mm
- Unit weight: 420g
- Mounting bracket included

Operating temperature

- -40°C to +70°C

GW1000M Front and Back Detail

		
GW1000M FRONT	GW1000M BACK	GW1000M-DC BACK

GW1000M Series Models

Model Code	Ethernet Ports	WiFi	Dual SIM	Mounting Bracket	Input Voltage	RF Bands
GW1032M	2	•	✓	✓	See notes below Refer to Radio Module datasheet	
GW1042M	2	•	✓	✓		
GW1042M-X	2	-	✓	✓		

• = Optional

Order codes:

Append the relevant suffix to the base model number.

RF band: select from the list on the Radio Module datasheet.

DC voltage options: see Power section above

No WiFi: add -X suffix.

Examples: GW1042M-X-QFR-DCn0936 with non-isolated 9-36VDC power input, no WiFi and QFR radio module.

GW1042M-X-QFR-DCi1860 with isolated 18-60VDC power input, no WiFi and QFR radio module.

Virtual Access (Ireland) Ltd., 9B Beckett Way, Park West Business Park, Dublin 12, D12 PK44, Ireland. Tel: +353 1 604 1800 Fax: +353 1 670 5380 dsht-GW1000MSeries

